MMC TELESCOPIC LOADER
2 STAGE

Reliable. Efficient. Versatile.
Built for Higher Performance.

MMC



INCREASE LOADING SPEED

REDUCE LABOUR DEPENDENCY

HANDLE HEAVY BAGS EASILY

SMOOTH & CONTINUOUS OPERATION

IMPROVE OVERALL PRODUCTIVITY

TECH SPECS

- Chassis - I- Beam: (4500 X 800 X 175) mm
- Conveyor Lengths- Front Boom
- Close Length - 6000 mm Open Length - 9400 mm
- Total Machine Length--
- Maximum - 13000 mm
- Minimum - 11000 mm
- Belt : PVC Green Plain Belt, thk - 5mm (Front Boom)
- PVC Rough Top belt cleats, thk - 5 mm(Rear Boom)
- Belt Width - 600 mm - Telescopic Belt
- Belt Width - 650 mm - Feeding Conveyor Belt
- Mobility - AUTOMATIC Tractor Tyres(600 x 16), Make- J.K.Tyres (CEAT Tube Assembly)
- Power : 11 HP (3 HP - Telescopic Belt Conveyor, 2 HP - Feeding Conveyor, 2 HP Power Pack,2 HP - Telescopic Drive, 2 HP Mobility)
- Electrical : Dual Panel Control (Main + Operator)
- Hydraulic : Dual piston on Front Side, Single on Rear for height adjustment

FEATURES :

- Truck Penetration - 5900 mm (20 feet)
- Speed - 800 Bags Per Hour (50 kg) OR 1000 Carton Boxes (25 Kg) Per Hour
- Stacking Height - 3300 mm (11 feets)
- Night Lamps LED's
- Automatic Chassis & Mobility + Braking System AC Geared Drive 2 HP with
- driving seat (With Wireless Remote Control)

Drawing :-

MMC TELESCOPIC 2 STAGE - DOCKLESS

MMC TELESCOPIC 2 STAGE OPEN BOOM POSITION

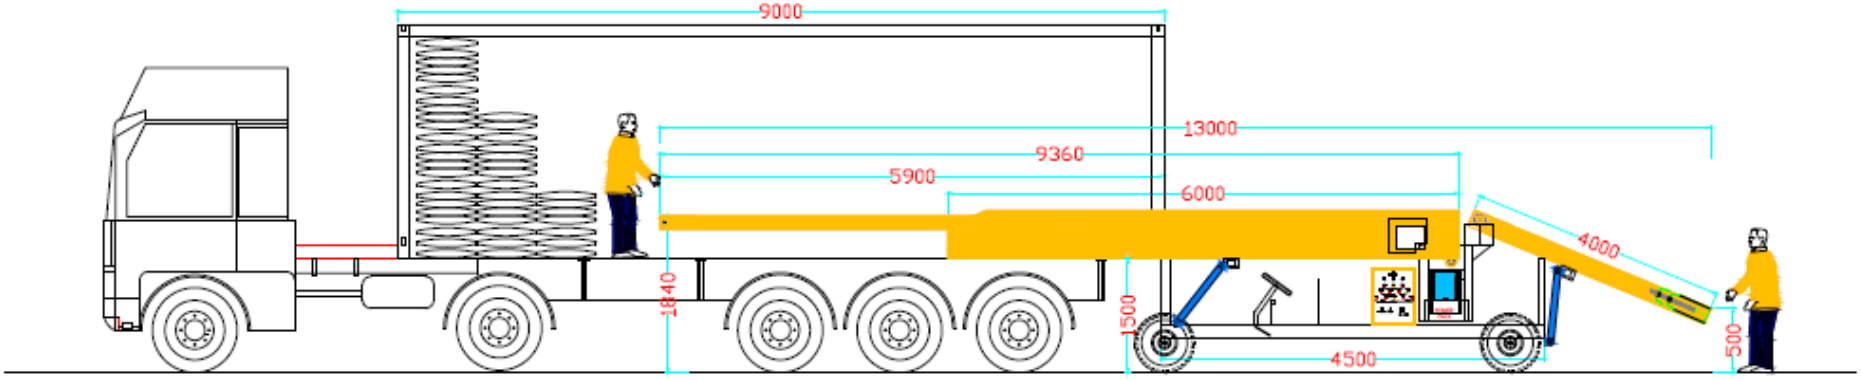

MMC TELESCOPIC 2 STAGE CLOSE BOOM POSITION

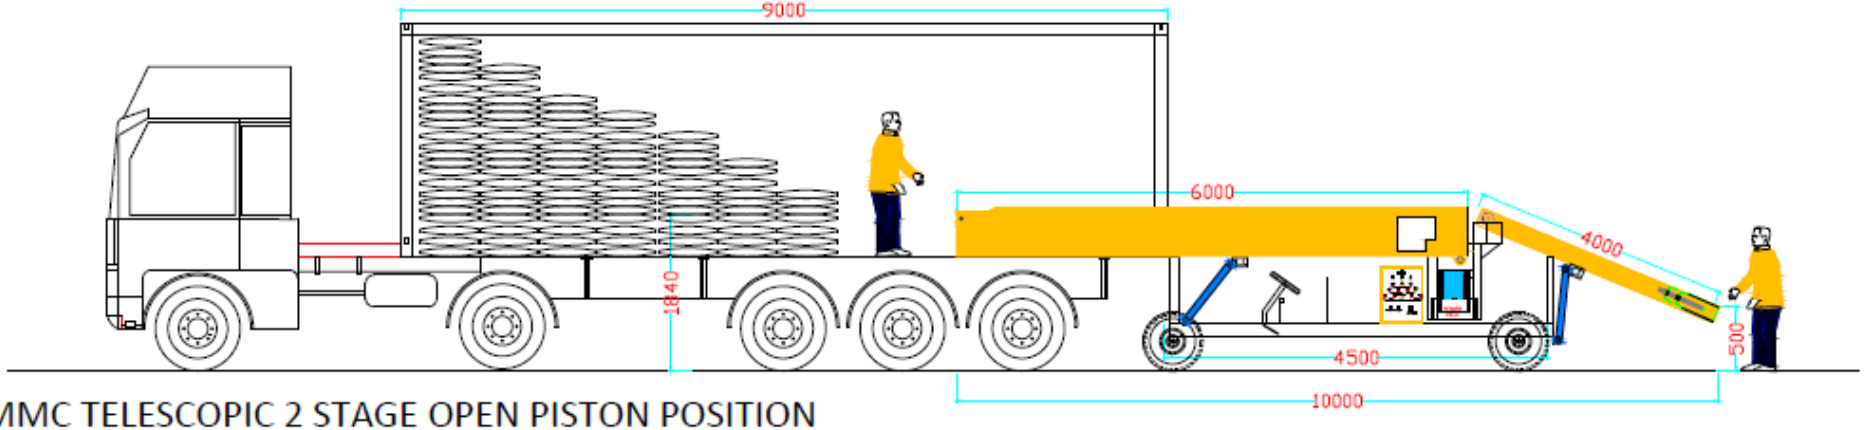

MMC TELESCOPIC 2 STAGE OPEN PISTON POSITION

Click here to watch video

MMC Telescopic 2 Stage Dockless Video